


不同基础的塔身组成和支座反力

/ TOWER COMPOSITION AND SUPPORT REACTION WITH DIFFERENT FOUNDATIONS


起重臂 (m) Jib	Rmin (m)	R (Cmax) (m)	Cmax (t)	幅度 (m) Range								
				48	50	52	55	58	60	62	65	
65m		2.70	29.32	5.00	2732	2589	2458	2279	2118	2020	1928	1800
		2.70	15.67	10.00	2652	2509	2378	2199	2038	1940	1848	1720
60m		2.70	29.64	5.00	2770	2626	2494	2312	2150	2050		
		2.70	15.84	10.00	2690	2546	2414	2232	2070	1970		
55m		2.70	31.23	5.00	2963	2811	2671	2480				
		2.70	16.69	10.00	2883	2731	2591	2400				
50m		2.70	32.85	5.00	3160	3000						
		2.70	17.55	10.00	3080	2920						

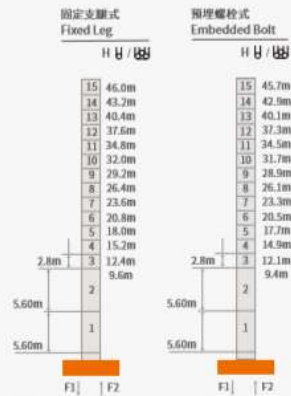

	固定支腿式 Fixed Leg		预埋螺栓式 Embedded Bolt	
	工况下 On-service	非工况下 Out-of-service	工况下 On-service	非工况下 Out-of-service
F1 (t)	98.4	143	98.4	143
F2 (t)	181	214	181	214

附着 / ANCHORAGES

H-起升高度 Hoisting Height

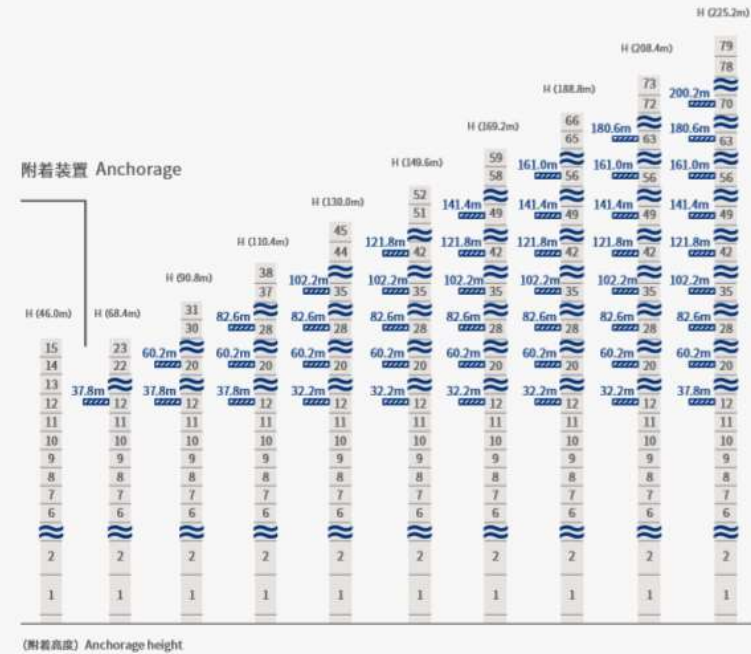

(附着高度) Anchorage height